

LED Panel 40W (4x18W*) 4400lm 120° IP20 natural light 4000K

General characteristics

Family name	HPB4060
Luminaire type	LED Panel
Installation options	Recessed, surface mounted, suspended
Intelligent control	No
Certificates	CE, RoHS
Warranty	2 years

Operating characteristic

Lifetime	35 000h
Switching cycle	> 20 000
LLMF	0,7
IP	20
Warm up time	negligible
Starting time	< 0,5s
Working temperature	from -20° to 40°C
Storage temperature	from -20° to 40°C

Electrical characteristic

Wattage	40W
Replaces*	4x18W
Voltage	185-265V
Voltage frequency	AC
Power factor	> 0,9


Light technical characteristic

Luminaire luminous flux	4400lm
Luminous efficacy	110lm/W
Color temperature	4000K
Light color	neutral
CRI	> 80
Beam angle	120°
Color consistency	< 6SDMC


Mechanical characteristic

Light source dimensions	595x595x24mm
Packaging dimensions	L650xW607xH33mm
Weight net	1,4kg
Weight gross	1,7kg
Material	Aluminum, PS


Technical drawing



Photometric solid

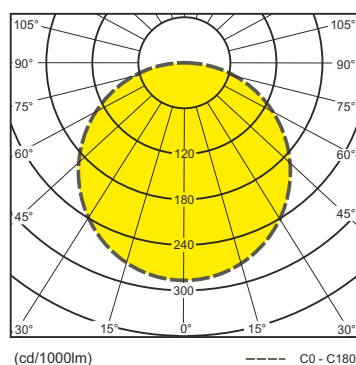

Spectrum

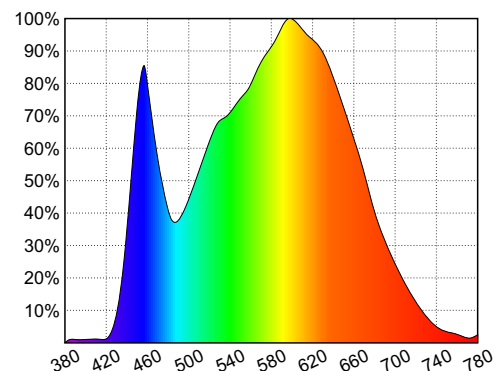

*wattage of luminaire with linear fluorescent lamp