

General characteristics

Family name	Linea
Luminaire type	Waterproof lamp
Integrated driver	Yes
LED chips manufacturer	Sunpu
Installation options	Surface
Intelligent control	None
Certificates	CE, RoHS
Warranty	2 lata
Materials	PC

Rated parameters

Rated power	60W
Rated luminous flux	5400lm
Rated lifetime	25 000h
Rated luminous intensity	498cd
Rated beam angle	120°

Light technical characteristic

Luminaire luminous flux	5400lm
Luminous efficacy	90lm/W
Color temperature	4000K
CRI	>80
Beam angle	120°
Color consistency	<6SDCM

Electrical characteristics

Wattage	60W
Voltage	170-265V
Voltage frequency	50-60Hz
Power factor	>0,9
Energy efficiency label	A+


Operating characteristics

Lifetime	25 000h
Switching cycle	> 15 000
LLMF	>0,7
IP	65
Warm up time	negligible
Starting time	<0,5s
Working temperature	from -20° to 45°C
Storage temperature	from -20° to 60°C



index	power	luminous flux	beam angle	IP	weight net/gross	luminaire dimesions	packaging dimensions
LHT064	60W	5400lm	120°	65	0,38kg/0,52kg	L1275xW64xH34mm	L1295xW80xH40mm

Photometric solid

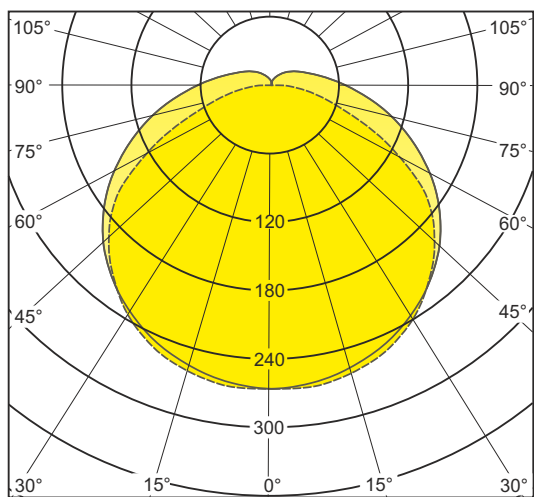

----- C0 - C180

Spectrum for CCT: 4000K

