

LED MOULD FOR CEILING LAMP



Technical data

<i>Voltage:</i>	<ul style="list-style-type: none">○ 230V; 50/60Hz○ 12VDC; 50/60Hz
<i>Power:</i>	9W; 18W; 22W
<i>Colour temperature:</i>	4000K; 2700K
<i>LED type:</i>	SMD5730
<i>Body:</i>	Epoxy board+PC
<i>Beam angle:</i>	120°
<i>Colour rendering index:</i>	Ra≥80
<i>Switch on/off:</i>	>30 000
<i>Average life:</i>	20 000h
<i>Protection against dust and moisture:</i>	IP20

Features

- Reduced operational cost thanks to lower energy consumption.
- Mercury free.
- Reduced operational cost thanks to lower energy consumption.
- Beautiful appearance, perfect for decoration
- Maximum resistance to switching loads.
- Correct operation even at low temperature.
- Instant-on light.
- Easy installation

Area of application

- Home
- Office
- Widely used for LED Ceiling Light

Variants and Dimensions


○ 230VAC

Watt	LED lamp lumens	Colour temp.	Beam angle	Size (mm)		Catalogue number
(W)	(lm)	(K)		Diameter	Height	
9	850	4000	120°	160	27	99LED766
9	850	2700	120°	160	25	99LED791
18	1700	4000	120°	220	25	99LED767
18	1700	2700	120°	220	27	99LED792
22	2100	4000	120°	270	25	99LED768
22	2100	2700	120°	270	25	99LED793

○ 12VDC

Watt	LED lamp lumens	Colour temp.	Beam angle	Size (mm)		Catalogue number
(W)	(lm)	(K)		Diameter	Height	
9	850	4000	120°	160	27	99LED766T
18	1700	4000	120°	220	25	99LED767T

Energy efficiency

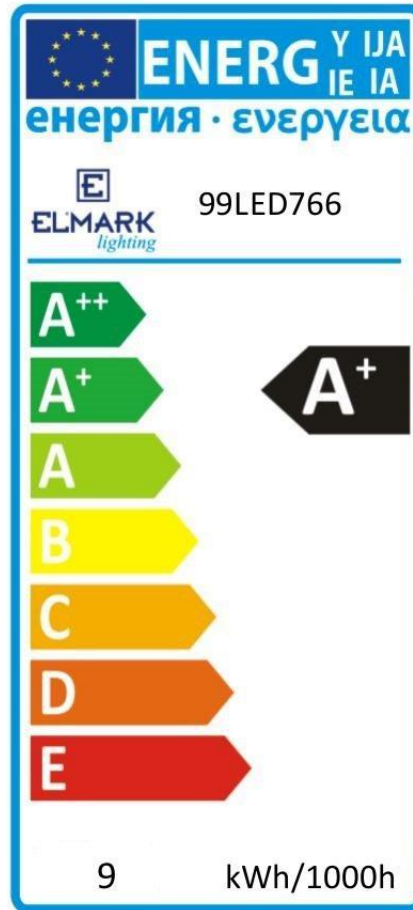

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 13032-4 • EN 62560 •

