

The Brand of Electricity

WADE FIXTURE IP65



TECHNICAL SPECIFICATION



OUTDOOR- LED FIXTURES

Technical data:

Rated voltage: 230V/ 50-60Hz

Power: 18W; 36W; 45W

Power supply: Driver mounted in the body

Colour temperature: 6500KLED source: Sanan SMD 2835

Colour: White

Body: polycarbonate (PC)Diffuser: polycarbonate (PC)

Clamps: inox

Colour rendering index: Ra≥80

Beam angle: 120°
Switch on/off: >20 000
Long life: 30 000h
Power factor: λ>0.9
Starting time: <1s

Protection against dust and moisture: IP65

Features:

- Completely replace traditional lighting fixtures
- Pleasant and uniform light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Safety, low voltage operation
- Instant light with maximum luminous flux
- Environmentally friendly no mercury and lead
- No ultraviolet and infrared rays

Area of application:


- Residential buildings
- Commercial buildings
- Administrative buildings
- Banks
- Hospitals

TECHNICAL SPECIFICATION





Variants and Dimensions:



Watt	Whole fixture lumens	Colour temp.	Colour body	Size (mm)		Catalogue number	
(W)	(lm)	(K)		Length	Width	Height	
18	1600	6500	White	700	55	35	9WF18CW
36	3500	6500	White	1230	55	35	9WF36CW
45	4300	6500	White	1530	53	35	9WF45CW


Barcodes:

9WF18CW	3800131214379
9WF36CW	3800131214386
9WF45CW	3800131214393

TECHNICAL SPECIFICATION



OUTDOOR- LED FIXTURES

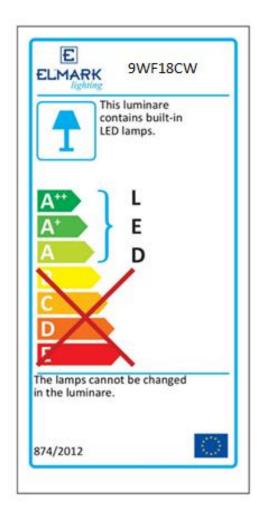

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 61347-1 • EN 61347-2-13 • EN 13032-4

